


ELEVATION VIEW

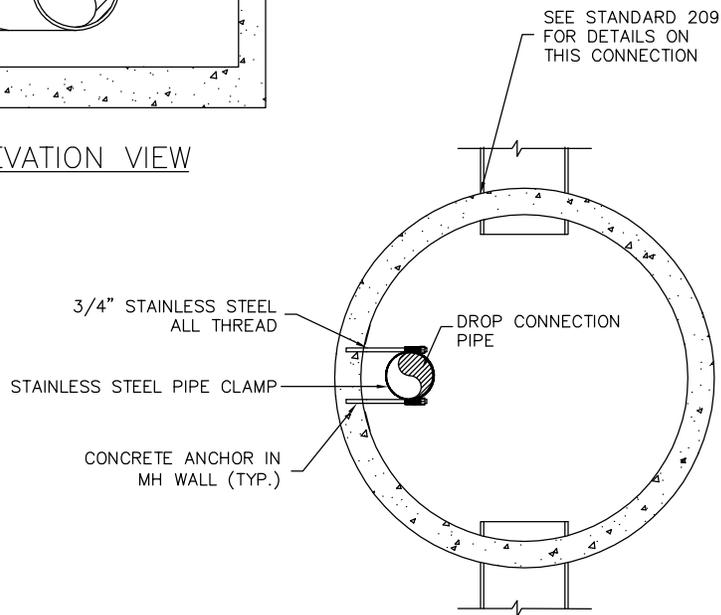

PIPE SUPPORT DETAIL (SEE NOTE 6)  
SECTION A-A

NOTES:

1. ALL OTHER ASPECTS OF MANHOLE CONSTRUCTION SHALL CONFORM WITH STANDARD 203.
2. MANHOLE ELEVATION SHALL CONFORM WITH STANDARD 205.
3. MANHOLE COVER AND FRAME SHALL CONFORM WITH STANDARD 206.
4. DROP CONNECTIONS ARE REQUIRED IF INFLOW INVERT ELEVATION IS MORE THAN 16" ABOVE THE OUTLET INVERT ELEVATION WHERE INVERT ELEVATIONS ARE LESS THAN 16" APART, A CHANNELIZED INVERT SHALL BE FORMED TO A MAXIMUM OF ONE INFLOW PIPE DIAMETER BELOW THE INFLOW PIPE INVERT.
5. STAINLESS STEEL PIPE SUPPORTS SHALL BE INSTALLED 3'-0" ON CENTER ON THE VERTICAL DROP PIPE.
6. A RELINER BRAND STAINLESS ADJUSTABLE CLAMPING BRACKET MAY BE USED IN PLACE OF THE ILLUSTRATED PIPE SUPPORT.
7. DROP PIPING SHALL BE THE DIAMETER SPECIFIED BY THE MANUFACTURER OF THE DROP ASSEMBLY.
8. IF MORE THAN ONE DROP CONNECTION IS MADE, INSTALL A MIN. 6' DIAMETER MANHOLE.
9. FORCE LINE HOOD FOR INSIDE DROP BOWL, RELINER BRAND OR APPROVED EQUAL.

SCALE: NTS	DATE: 5/5/99	CITY AND BOROUGH OF JUNEAU, ALASKA SANITARY SEWER DROP MANHOLE
DRAWN BY: TAD	CHECKED BY: STAFF	
APPROVED BY: 	REVISED: 8/14/2011	STANDARD 204