



ENGINEERING DEPARTMENT

ADDENDUM TO THE CONTRACT

for the

CRUISE SHIP TERMINAL STAGING AREA IMPROVEMENTS - PHASE 1

Contract No. DH12-002

ADDENDUM NO.: TWO

CURRENT DEADLINE FOR BIDS:
July 3, 2012

PREVIOUS ADDENDA: ONE

ISSUED BY: City and Borough of Juneau
ENGINEERING DEPARTMENT
155 South Seward Street
Juneau, Alaska 99801

DATE ADDENDUM ISSUED: June 28, 2012

The following items of the contract are modified as herein indicated. All other items remain the same. This is a faxed addendum. A confirming copy will not be mailed to you. This addendum has been issued and is posted online. Please refer to the CBJ Engineering Contracts Division webpage at: <http://www.juneau.org/engineering ftp/contracts/Contracts.php>

VOLUME I:

Item No. 1 SECTION 02726 – TIMBER DOCK, Part 3 - Execution:

Add the following paragraph:

“3.7 The condition of the existing pile supported deck to be demolished is poor. Confirm structural capacity of all existing deck structures intended to be accessed by construction equipment in advance of equipment mobilization. Provide work plan and structural calculations performed by an Alaska registered engineer to demonstrate adequacy of existing decks to safely support proposed equipment and material loads.”

Item No. 2 SECTION 05120 – METAL FABRICATION, Paragraph 2.1.D:

Delete this paragraph in its entirety.

VOLUME II:

Item No. 3 DRAWING SHEET 1.07, DEMOLITION SITE PLAN AND SUMMARY TABLE:

DEMOLITION SUMMARY TABLE: Item 13 – Demolish Timber Retaining Walls:

Add the following note: "Demolish to limits shown on typical sections in areas adjacent to new concrete retaining walls. In other areas, demolish to a minimum of 6' below finish grade and as additionally required to install new improvements."

Item No. 4 DRAWING SHEET 3.06, SOUTH FERRY DOCK - PILE CAP DETAIL:

Add the following sheet note: "All pile caps shall be hot dip galvanized full length."

Change Typical Section C Pile Cap Detail subtitle to read "AT GRID SF3".

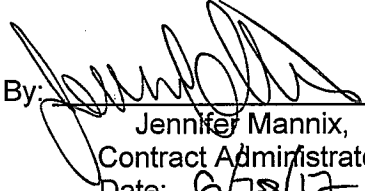
Change Typical Section D Pile Cap Detail subtitle to read "AT GRID SF4".

Change Typical Section E Pile Cap Detail subtitle to read "AT GRID SF5".

Change Typical Section F Pile Cap Detail subtitle to read "AT GRID SF7".

Item No. 5 DRAWING SHEET 3.09, SOUTH FERRY DOCK – STRUCTURAL DETAILS:

Add the following note to Typical Section E CONCRETE EDGE SUPPORT BRACKET:
"3/4 inch bent plate may be provided in lengths between 8-10 feet in lieu of a continuous section."

By: 
Jennifer Mannix,
Contract Administrator
Date: 6/28/12

Total number of pages contained within this Addendum: 2