



ADDENDUM TO THE CONTRACT

for the

VISITOR'S INFORMATION KIOSK REPLACEMENT Contract No. DH19-039

ADDENDUM NO.: ONE

CURRENT DEADLINE FOR BIDS:

January 8, 2019

PREVIOUS ADDENDA: NONE

ISSUED BY:

City and Borough of Juneau
ENGINEERING DEPARTMENT
155 South Seward Street
Juneau, Alaska 99801

DATE ADDENDUM ISSUED:

December 21, 2018

The following items of the contract are modified as herein indicated. All other items remain the same. This addendum has been issued and is posted online. Please refer to the CBJ Engineering Contracts Division webpage at: <http://www.juneau.org/engineering ftp/contracts/Contracts.php>

DRAWINGS:

- Item No. 1 SHEET A101 - OVERALL SITE PLAN
Replace with attached SHEET A101
- Item No. 2 SHEET A102 - SITE AND DEMO PLAN
Replace with attached SHEET A102
- Item No. 3 SHEET E101 - ELECTRICAL PLANS AND DETAILS
Replace with attached SHEET E101

By: _____


For




Greg Smith,
Contract Administrator

Total number of pages contained within this Addendum: 4




522 West 10th Street
 Juneau, Alaska 99801
 phone 907-586-1070
 fax 907-586-3959
jensenyorbalott.com



REVISIONS	
	Addendum 1
	.
	.

DATE: December 20, 2018
FILE: 18005

A101

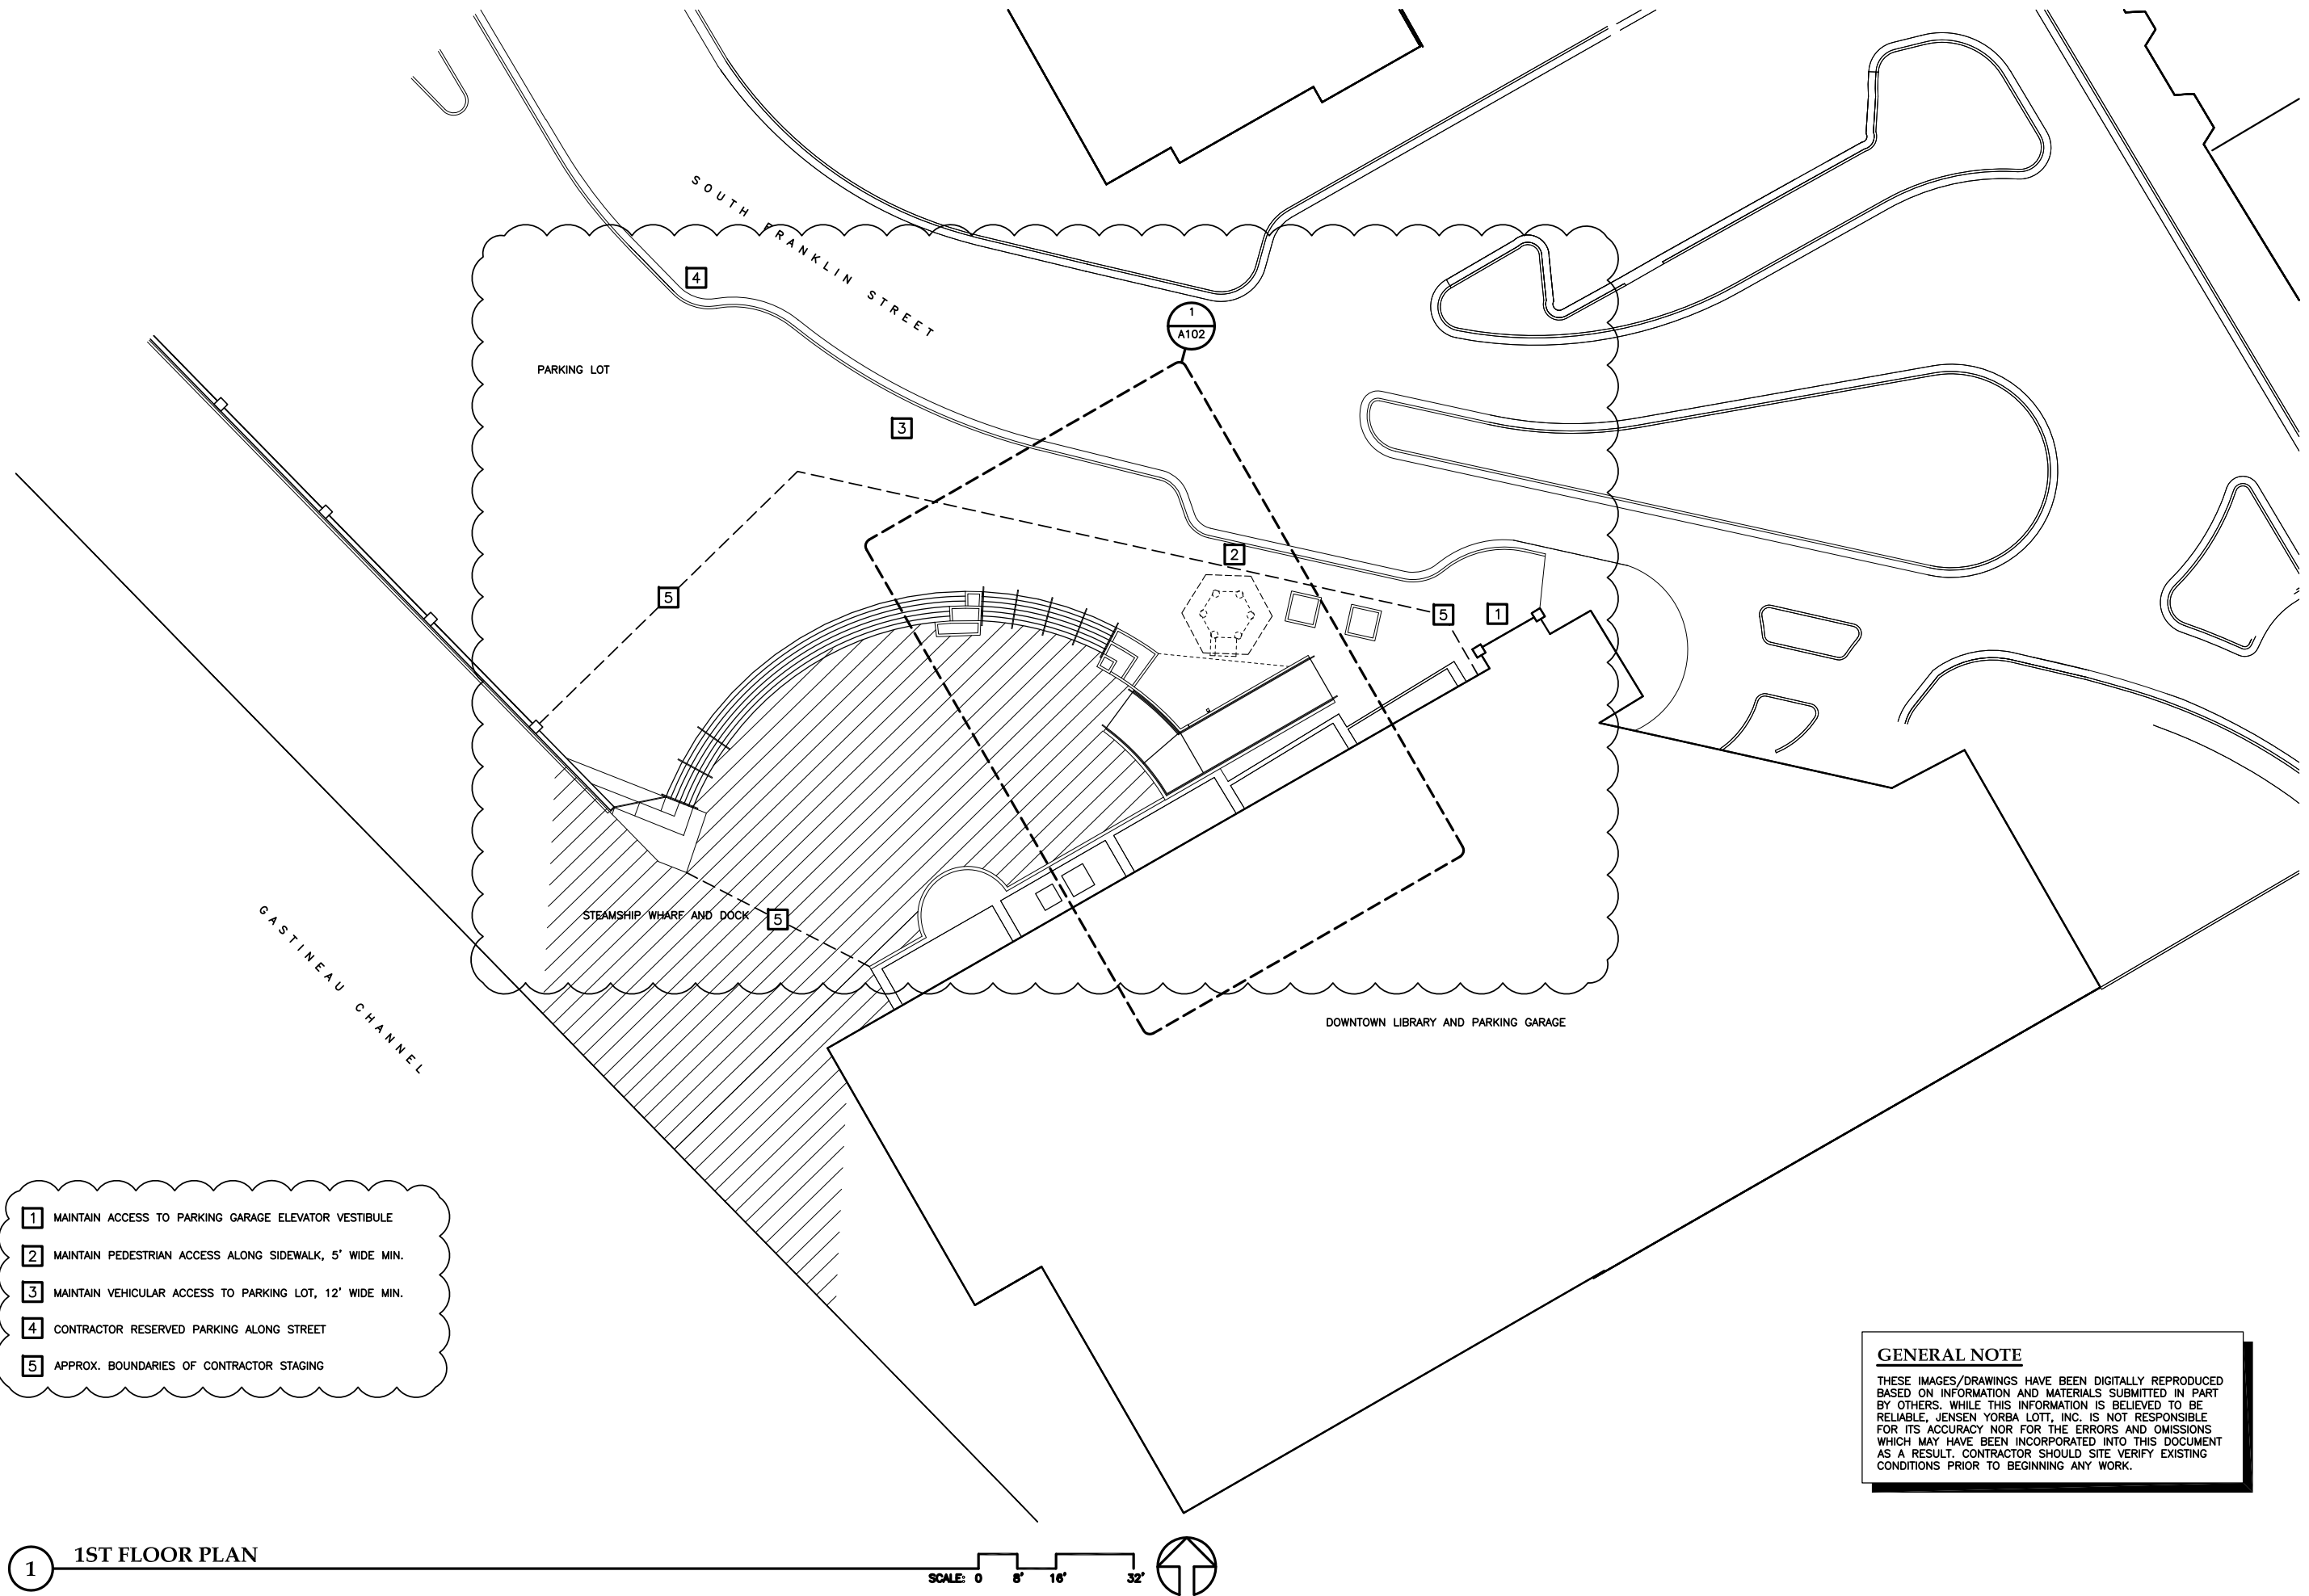

SOUTH FRANKLIN STREET

EX. PLANTER
TO REMAIN,
PROTECT
TREES DURING
CONSTRUCTION

REMOVE EX.
CONC.
FOOTINGS AS
REQ'D FOR
PAVERS AND
NEW WORK

REMOVE EX.
WOOD-FRAMED
KIOSK

APPROX.
FOOTING
EXTENT, SEE
NEW WORK

EX. BRICK
PAVERS,
REMOVE AS
REQ'D FOR
NEW WORK,
SAVE FOR
REINSTALLATION

REMOVE EX.
CONC. SLAB

EX. CONC.
RETAINING
WALL,
PREPARE FOR
NEW WORK

REMOVE EX.
TELEPHONE
EQUIP, SEE
ELECT.

EX. CONC.
PLANTER,
PREPARE FOR
NEW WORK,
SEE STRUCT.

APPROX.
FOOTING
EXTENT, SEE
NEW WORK

EX. STAIRS

EX. CONC.
RETAINING
WALL,
PREPARE FOR
NEW WORK

EX. CONC.
RAMP

EX. PLANTERS
TO REMAIN,
PROTECT
TREES DURING
CONSTRUCTION

DOWNTOWN LIBRARY AND PARKING GARAGE

EX.
ELECTRICAL
EQUIP.

- 1 EX. BURIED PHONE VAULT TO REMAIN. PROTECT DURING CONSTRUCTION, SEE ELECT.
- 2 EX. BURIED PHONE CONDUIT. PROTECT DURING CONSTRUCTION. OWNER WILL RELOCATE AS REQ'D TO CONNECT TO NEW DEMARK, SEE ELECT.


1ST FLOOR PLAN

SCALE: 0 2' 4' 8'



GENERAL NOTE

THESE IMAGES/DRAWINGS HAVE BEEN DIGITALLY REPRODUCED BASED ON INFORMATION AND MATERIALS SUBMITTED IN PART BY OTHERS. WHILE THIS INFORMATION IS BELIEVED TO BE RELIABLE, JENSEN YORBA LOTT, INC. IS NOT RESPONSIBLE FOR ITS ACCURACY NOR FOR THE ERRORS AND OMISSIONS WHICH MAY HAVE BEEN INCORPORATED INTO THIS DOCUMENT AS A RESULT. CONTRACTOR SHOULD SITE VERIFY EXISTING CONDITIONS PRIOR TO BEGINNING ANY WORK.



**Jensen
Yorba
Lott**
Inc.

522 West 10th Street
Juneau, Alaska 99801
phone 907-586-1070
fax 907-586-3959
jensenyorbalott.com



City and Borough of Juneau
Docks and Harbors
Information Kiosk
Juneau, Alaska

100% Bid Set

REVISIONS

△ Addendum 1





SHEET TITLE

SITE AND DEMO PLAN




DATE: December 20, 2018

FILE: 18005

A102

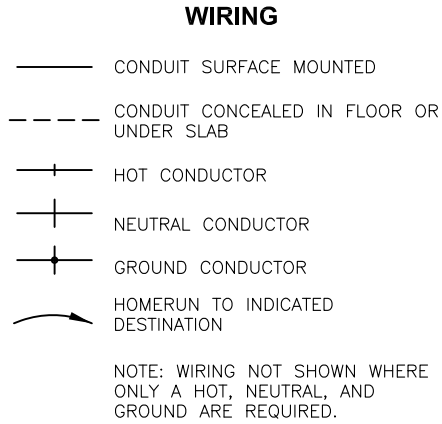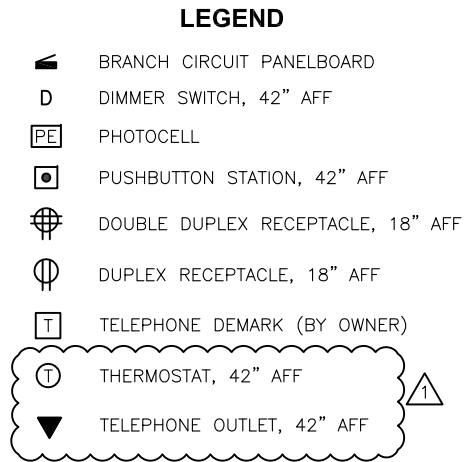

- NOTES:**
- PROVIDE SUPPORT TO GENERAL CONTRACTOR FOR DEMOLITION OF EXISTING KIOSK. DEMOLISH (4) EXISTING BRANCH CIRCUITS BACK TO PANELBOARD MDP2 IN THE EXISTING ELECTRICAL ENCLOSURE. REFER TO DRAWING A102.
 - PROVIDE PULL BOXES AS REQUIRED FOR FEEDER FROM MDP2 TO PANELBOARD K.
 - PANELBOARD K: LOAD CENTER TYPE, SQUARE D, OR APPROVED EQUAL.
 - TYPE A LIGHT FIXTURE: DIRECT/INDIRECT PENDANT, LUMENWERX VIA3PDI HLO WIO LED 80 1000 1000 35 8' 120V D1 153WAC36 AL, OR APPROVED EQUAL.
 - TYPE B LIGHT FIXTURE: RGBA FLOODLIGHT, ACCLAIM LIGHTING DFC 211 AU FN, OR APPROVED EQUAL.
 - TYPE B CONTROLLER: TOUCH BASED WALL-MOUNT DMX CONTROLLER, ACCLAIM LIGHTING ART 4 PRO, OR APPROVED EQUAL.
 - TYPE C LIGHT FIXTURE: INDIRECT WALL PACK, LUMIERE 303 W1 LEDB1 3500 UNV T4 DIM10 CS, OR APPROVED EQUAL.
 - BASEBOARD HEATER: HYDRONIC ELECTRIC QMARK HBB508 WITH ELECTRONIC PROGRAMMABLE THERMOSTAT TH106A, OR APPROVED EQUAL.
 - EMERGENCY POWER OFF PUSHBUTTON: RECESSED, KNOX REMOTE POWER BOX.
 - PROVIDE HAND-OFF-AUTO SWITCH AND PHOTOELECTRIC CELL FOR EXTERIOR LIGHTING CIRCUIT.
 - PROVIDE 60/2 CIRCUIT BREAKER IN EXISTING MDP2 FOR PANELBOARD K FEEDER. TERMINATE AT MDP2-27,29.
 - PROVIDE 1" RACEWAY FROM TELEPHONE OUTLET TO TELEPHONE DEMARK. COORDINATE WITH THE OWNER.

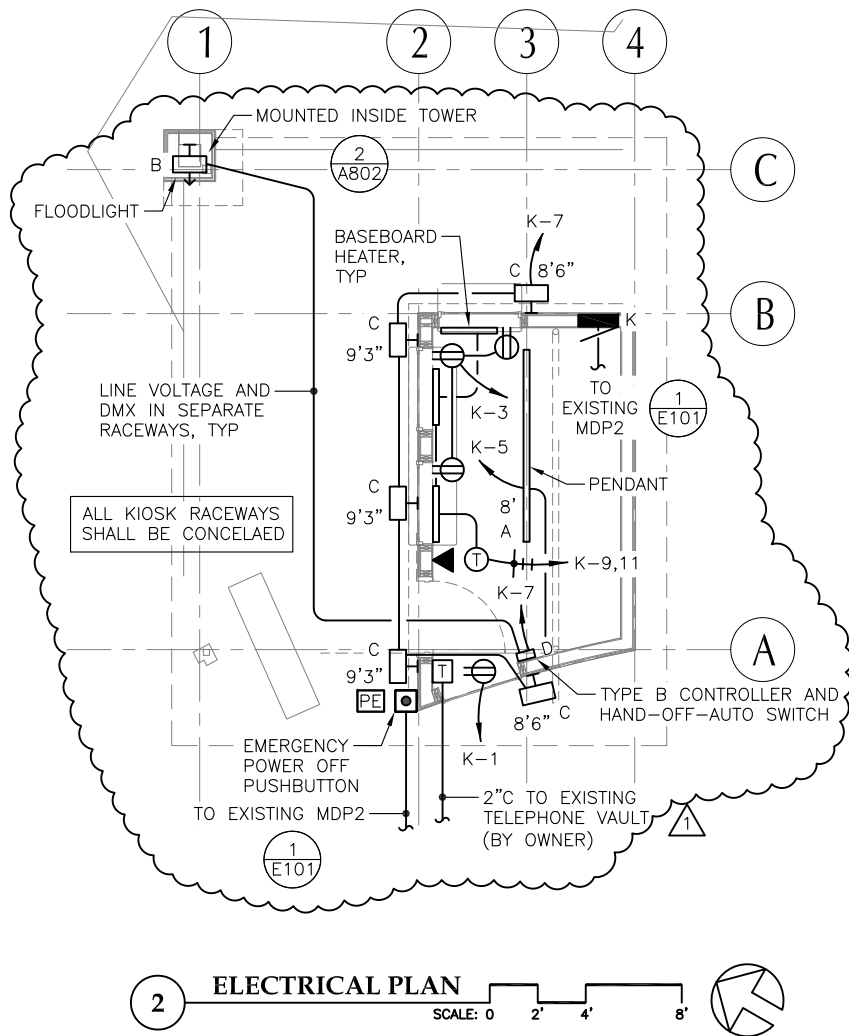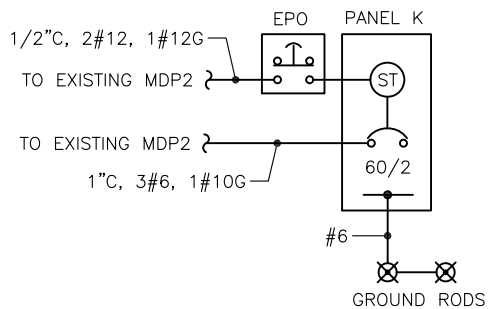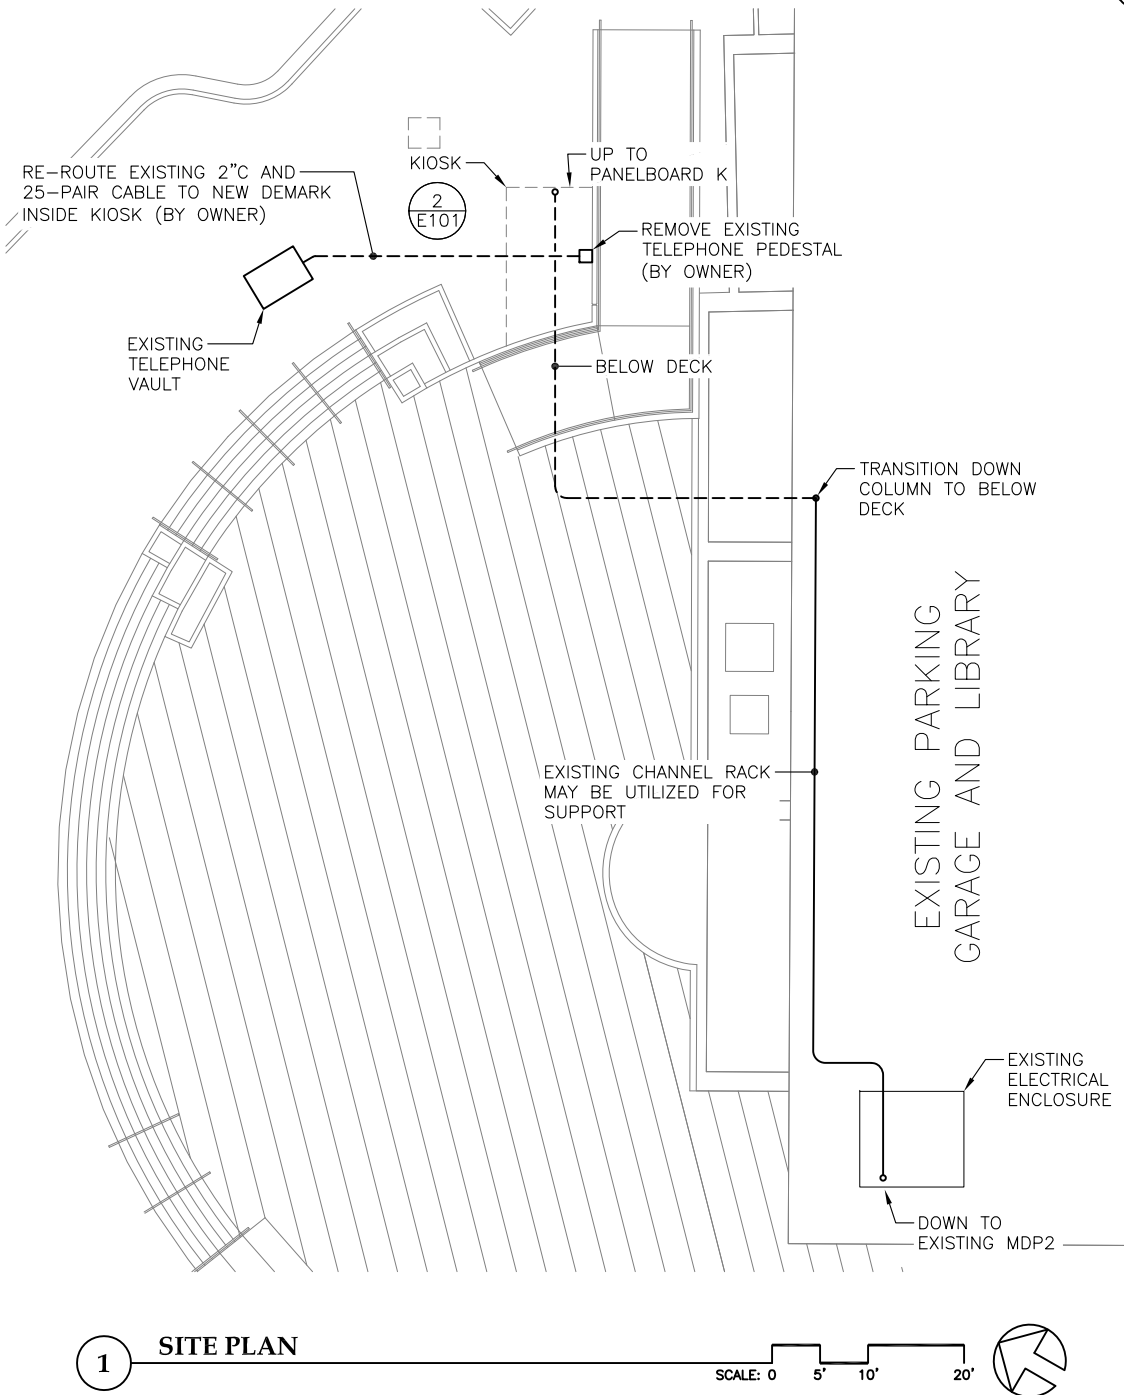

PANEL K									
POLE NO.	LOAD SERVED	LOAD		CB	PH	CB	LOAD		POLE NO.
		TYPE	KVA				TYPE	KVA	
1	RECEPTACLES	R	0.2	20/1	A	20/1			2
3	RECEPTACLES	R	0.5	20/1	B	20/1			4
5	INTERIOR LIGHTING	L	0.1	20/1	A	20/1			6
7	TOWER LIGHTING	L	0.1	20/1	B	20/1			8
9	BASEBOARD HEATERS	C	0.8	20/2	A	20/1			10
11	----	C	0.8	--	B	20/1			12
13	SPARE	--	--	20/1	A	20/1			14
15	SPARE	--	--	20/1	B	20/1			16
VOLTAGE: 120/208V, 1P, 3W		LOAD SUMMARY		CONNECTED LOAD (KVA)	DEMAND FACTOR		DEMAND KVA	NOTES: 1. PROVIDE SHUNT TRIP MAIN CB.	
AIC RATING: 10,000A		(L) LIGHTING		0.2	100% OF LOAD		0.2		
MOUNTING: FLUSH		(R) RECEPTACLE		0.7	NEC 220-44		0.7		
MAIN: 60/2		(M) MOTOR		.	NEC 430-24		.		
BUS: 60A		(C) CONTINUOUS		1.5	125% OF LOAD		1.9		
		(N) NON-CONTINUOUS		.	100% OF LOAD		.		
		(K) KITCHEN		.	NEC 220-56		.		
		TOTAL		.			2.8		

Jensen Yorba Lott Inc.

EGENYI ENGINEERING, LLC

217 2nd ST, STE 208, JUNEAU, AK 99801
PH: (907) 586-5900 / FAX: (907) 586-5901

49th
Borough of Juneau
E 10453
PROFESSIONAL ENGINEER
DECEMBER 12, 2018

City and Borough of Juneau
Docks and Harbors

Information Kiosk

Juneau, Alaska

100% Bid Set

REVISIONS

12-20-18

SHEET TITLE

ELECTRICAL PLANS AND DETAILS

DATE: December 12, 2018
FILE: 18005

E101