ENGINEERING DEPARTMENT

ADDENDUM TO THE CONTRACT

for the

Downtown Seawalk – Miner's Cove to Franklin Dock
Contract No. E13-288

ADDENDUM NO.: **THREE**

CURRENT DEADLINE FOR BIDS:
August 14, 2013

PREVIOUS ADDENDA: **TWO**

ISSUED BY:

City and Borough of Juneau
ENGINEERING DEPARTMENT
155 South Seward Street
Juneau, Alaska 99801

PREVIOUS DEADLINE FOR BIDS:
August 13, 2013

DATE ADDENDUM ISSUED: **August 7, 2013**

The following items of the contract are modified as herein indicated. All other items remain the same. This addendum has been issued and is posted online. Please refer to the CBJ Engineering Contracts Division webpage at:
http://www.juneau.org/engineering_ftp/contracts/Contracts.php and click on the link for this project.

INFORMATION ITEM:

- A Question and Response document will be posted on the above-referenced website and updated as needed. The intent is to share contractor questions and design team responses that do not require bid document modifications. Any responses that require modification to the bid documents will be made by addendum.

PROJECT MANUAL:

Item No. 1 SECTION 00030 - Notice Inviting Bids. Deadline for Bids.

Change the date of the Deadline for Bids ***from*** AUGUST 13, 2013 ***to*** August 14, 2013. The time remains the same.

SPECIAL PROVISIONS:

Item No. 2 SECTION 02458 – STEEL PIPE PILES, PART 1 – GENERAL, Article 1.3, SUBMITTALS, ***Add*** the following Paragraph: I:

I. Installation Plan and Qualifications: Submit a work plan as well as qualifications and experience of all personnel who will be involved with the installation of piles thirty (30) days prior to commencing the pile installation work.

1. Work Plan: Contactor shall submit a complete operational plan for installation of piles. Plans shall include schedule of work, equipment to be used and pile driving methods(s).

2. Personnel Qualifications and Experience: include the following information for all proposed personnel involved in pile installation work:
   a. List experience using proposed equipment.
   b. List experience with projects of similar scope and scale."

Item No. 3 SECTION 02458 – STEEL PIPE PILES, PART 1 – GENERAL, Article 1.4 QUALITY ASSURANCE, Paragraph A. ***Replace*** the words "A firm" ***with*** "Personnel".

Item No. 4 SECTION 02458 – STEEL PIPE PILES, PART 2 – PRODUCTS, Article 2.4 FABRICATION, Paragraph A. ***Add*** the following sentence to the end of Paragraph A:

"If CONTRACTOR is unable to supply full length piles to the project site, the CONTRACTOR may splice shorter piles with a Complete-Joint-Penetration weld with the approval of the ENGINEER. CONTRACTOR shall be responsible for all costs associated with splicing piles which are shorter than the contract documents and the specifications require."

Item No. 5 SECTION 02458 – STEEL PIPE PILES, PART 3 – EXECUTION, Article 3.4 FIELD QUALITY CONTROL, Paragraph A. ***Change*** the word "CONTRACTOR" ***to read*** "OWNER".

Item No. 6 SECTION 03300 – CAST-IN-PLACE CONCRETE, PART 3 – EXECUTION, Article 3.13, FIELD QUALITY CONTROL, Paragraph A. ***Add*** the words "OWNER shall" before the word "Engage".

Item No. 7 SECTION 03300 – CAST-IN-PLACE CONCRETE, PART 3 – EXECUTION, Article 3.13, FIELD QUALITY CONTROL, Paragraph C.8, ***Delete*** subparagraph a.

Item No. 8 SECTION 03300 – CAST-IN-PLACE CONCRETE, PART 3 – EXECUTION, Article 3.13 FIELD QUALITY CONTROL, Paragraph C, ***Delete*** Paragraph 9.

Item No. 9 SECTION 05120 – STRUCTURAL STEEL FRAMING, PART 3 – EXECUTION, Article 3.4 FIELD QUALITY CONTROL, Paragraph A. ***Add*** the words "OWNER shall" before the word "Engage".

Item No. 10 SECTION 08800 – GLAZING, PART 1 – GENERAL, Article 1.6 – WARRANTY, ***Delete*** and ***replace*** the last sentence with the following:


"Warranty Period: 5 years from the date of substantial completion."

DRAWINGS:


Item No. 11 Sheet S-502 – Details. ***Delete*** and ***replace*** with the attached sheet labeled Addendum No. 3. (Removes requirement for checkered plate since the plate has a non-skid coating).

By: _____
Jennifer Mannix,
Contract Administrator


Total number of pages contained within this Addendum: 3

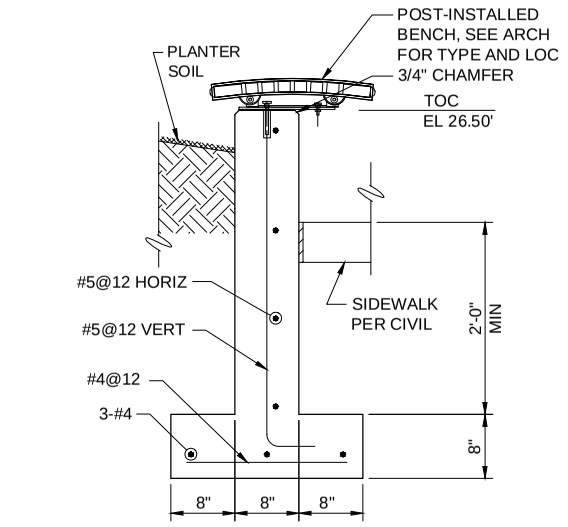


1 DETAIL
S-102, S-103, S-105, S-112 — S-115 — SCALE:1"=1'-0"

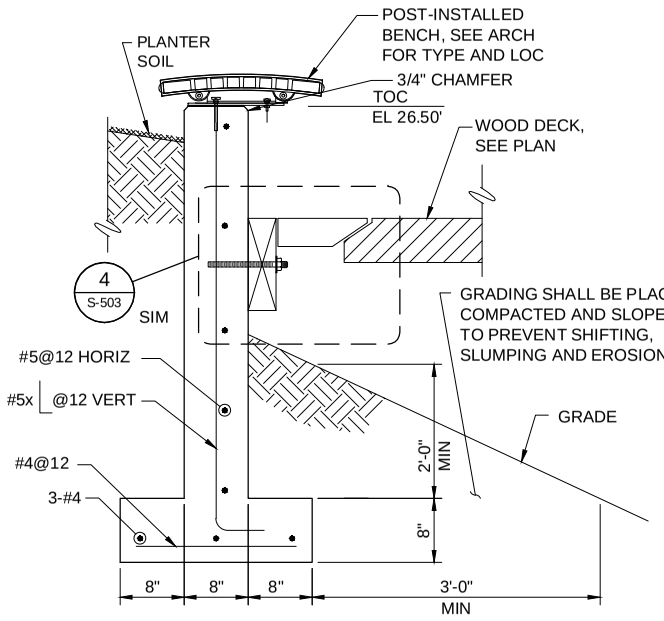


2 DETAIL
S-102, S-103, S-105, S-112, S-113 — S-115 — SCALE:1"=1'-0"

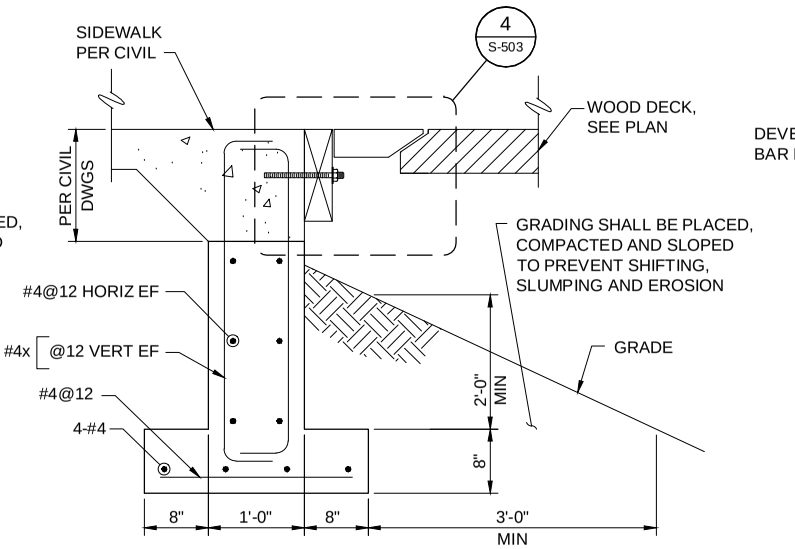


3 DETAIL
S-102, S-105, S-112 — S-115 — SCALE:1"=1'-0"

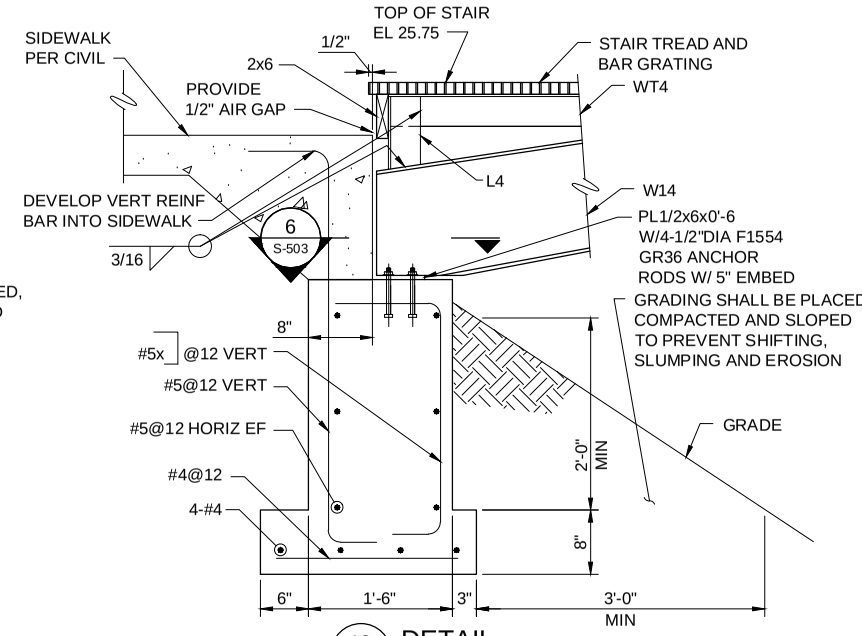


10 DETAIL
S-102, S-112 — S-504 — SCALE:1"=1'-0"

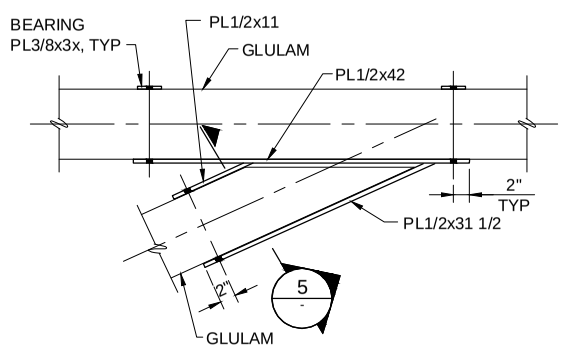


4 DETAIL
S-111 — SCALE:1"=1'-0"

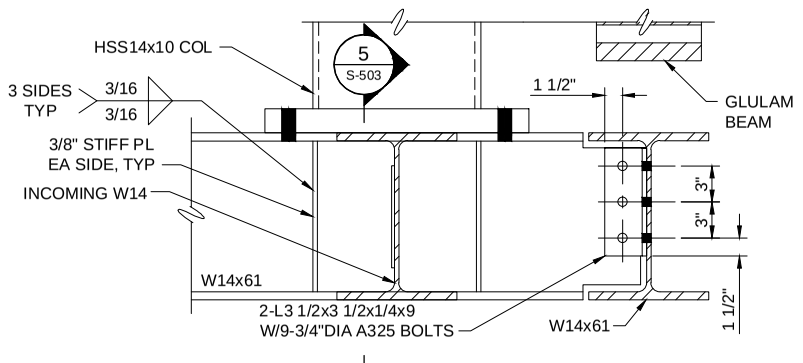

6 DETAIL
S-113, S-114 — S-501 — SCALE:1 1/2"=1'-0"

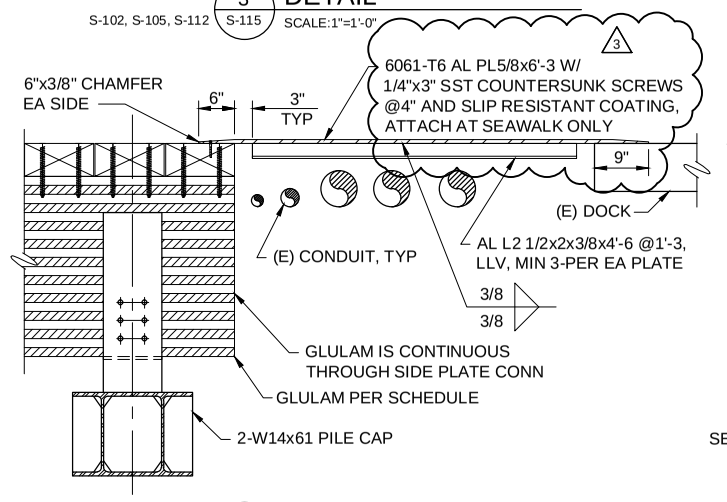



8 DETAIL
S-114 — SCALE:3/4"=1'-0"

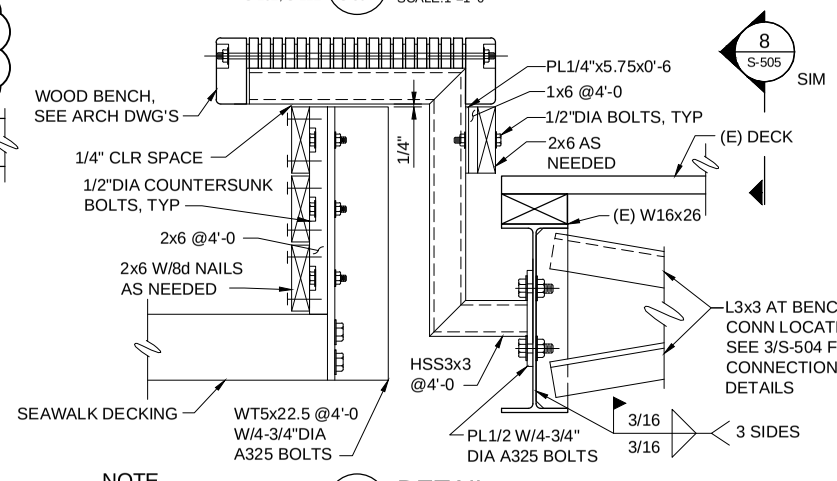


NOTE
SEE BENCH SUPPORT SCHEDULE ON S-505

11 DETAIL
S-112 — SCALE:1 1/2"=1'-0"

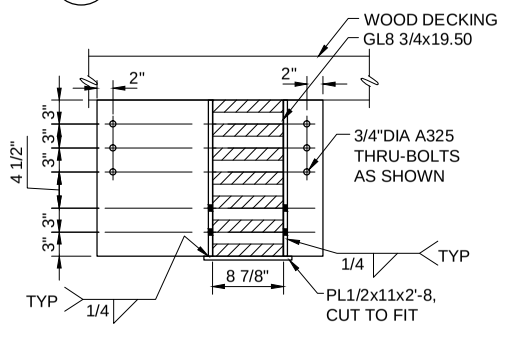


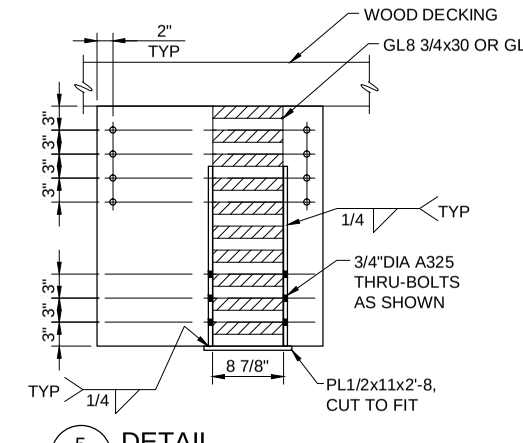


5 DETAIL
– — SCALE:1"=1'-0"

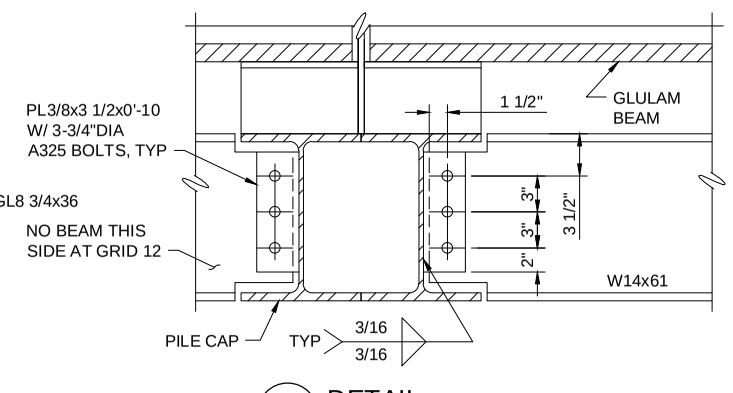

7 DETAIL
S-113 — S-114 — SCALE:1 1/2"=1'-0"

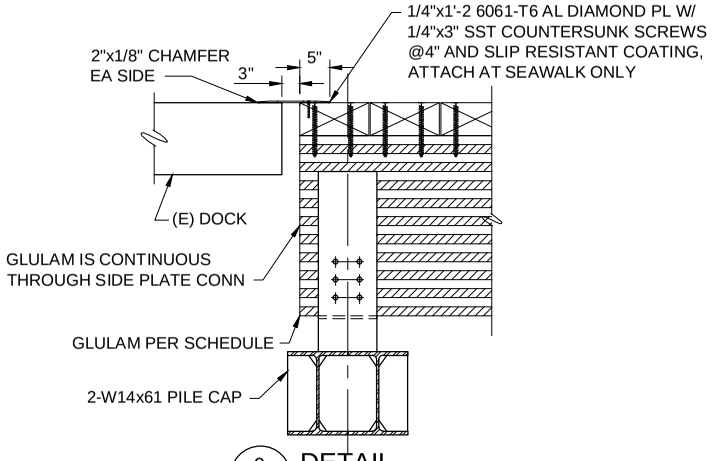

9 DETAIL
S-114 — SCALE:3/4"=1'-0"

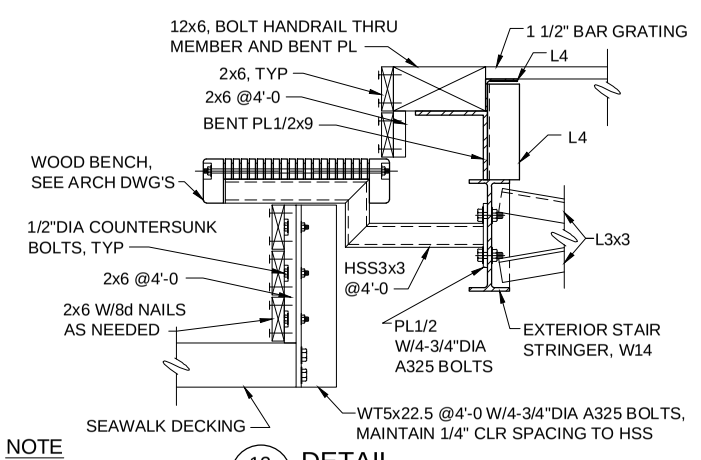

NOTE
SEE BENCH SUPPORT SCHEDULE ON S-505

12 DETAIL
S-112 — SCALE:1"=1'-0"

SCALE: 1 1/2" = 1'-0"
SCALE: 1" = 1'-0"
SCALE: 3/4" = 1'-0"

TETRA TECH
www.tetratech.com
230 South Franklin Street, Suite 212
Juneau, AK 99801
Tel 907.586.6400 Fax 907.463.3677

STATE OF ALASKA — JOHN C. McGLENN — No. CE 4456 — REGISTERED PROFESSIONAL ENGINEER — 29th

BID SET

MARK	DATE	DESCRIPTION	BY
A	2012-05-24	35% DESIGN SUBMITTAL	
B	2012-08-09	65% DESIGN SUBMITTAL	
C	2013-05-01	90% DESIGN SUBMITTAL	
D	2013-06-10	BID SET	
1	2013-07-26	ADDENDA #1	
2	2013-07-31	ADDENDA #2	
3	2013-08-07	ADDENDA #3	

CITY/BOROUGH OF JUNEAU

DOWNTOWN SEAWALK
MINER'S COVE TO FRANKLIN DOCK

DETAILS

Project No.:	135-12554-12002
Designed By:	TJT
Drawn By:	TJT
Checked By:	HRN

S-502

Sheet 26 of 78

Copyright: Tetra Tech

Bar Measures 1 inch

8/7/2013 12:44:21 PM - S:\ACTIVE\3590008 - JUNEAU SEAWALK\SEAWALK MINER'S COVE TO ROCK DUMP\CAD\SHEETFILES\S-501-510-DETAILS.DWG - SANTHUFF, BRETT